# **Play value**

The stone block allows you to experience the effect of mass and gravity, time, rhythm and weightlessness on your own body. You sit on the stone block and swing lightly with your eyes shut. Your own movements appear to be unusually slowed down. A hint of weightlessness can be perceived. Or try to make the stone begin to swing merely with a thread placed around the cable.





#### **Stone Pendulum**

## **Recommended for**


- School children
- Young people
- Adults
- Supervised play areas, such as schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Vandalism	not vulnerable
	recommended (with deflection limiting chain)
Supervision	absolutely necessary (without deflection limiting chain)
Explanation Board	recommended
Installation	outdoors
Safety check (DIN EN 1176)	has been completed
Installation in concrete	not possible







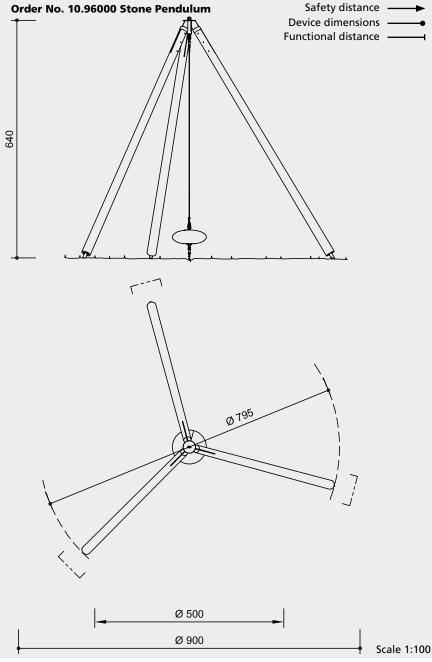

Safety check according to DIN EN 1176

### Components

- 1 Complete piece of equipment with stone and cable
- 1 Chain with limited swing range
- 1 Short chain with padlock

## Trademark

30 2005 500 000 Germany 40-0682207 South Korea

Explanation board on request

## **Installation information**

Surfacing requirements corresponding to a fall height of  $\leq$  1.00 m (please refer to price list for more detailed information)

Foundations
4 items 80 x 80 x 80 cm
reinforced
Blinding layer
80 x 80 x 5 cm
Total excavation depth 105 cm

#### Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.



Supports made of mountain larch with galvanised steel feet

#### **Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



#### Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



# For more detailed explanation of the quality characteristics see price list.

Rotating bearing with ball bearings, high-tensile stainless steel cable

Central limited swing range with chain and stainless steel swivel, alternatively short chain with padlock that can be removed by a supervisor

Double secured suspension at pendulum joint and the suspension of the stone

#### **Dimensions**

(small deviations possible)

Frame

 Height
 6.40 m

 Diameter
 Ø 7.95 m

 Space
 Ø 9.00 m

 Weight
 900 kg

Stone

Diameter 0.40 -0.80 m Weight 150 - 350 kg

