

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



For more detailed explanation of the quality characteristics see price list.

Professional climbing grips made of a mixture of sand-synthetic resin with 100% safe anti-rotation system against unintended twisting of the grips

Dimensions

(small deviations possible)

Order No. 3.67505 Height Width	2.00 m 2.00 m
Order No. 3.67506 Height Width	2.00 m 2.40 m
Order No. 3.67515 Height Width	2.30 m 2.00 m
Order No. 3.67516 Height Width	2.30 m 2.40 m

Safety check according to DIN EN 1176

Components

Order No. 3.67505

1 Climbing wall with 8 climbing grips

Order No. 3.67506

1 Climbing wall with 11 climbing grips

Order No. 3.67515

1 Climbing wall with 10 climbing grips

Order No. 3.67516

1 Climbing wall with 13 climbing grips

Installation information

Surfacing requirements corresponding to a fall height of **Order No. 3.67505 / 3.67506** \leq 2.00 m **Order No. 3.67515 / 3.67516** \leq 3.00 m (please refer to price list for more detailed information)

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.











3.67505 3.67506

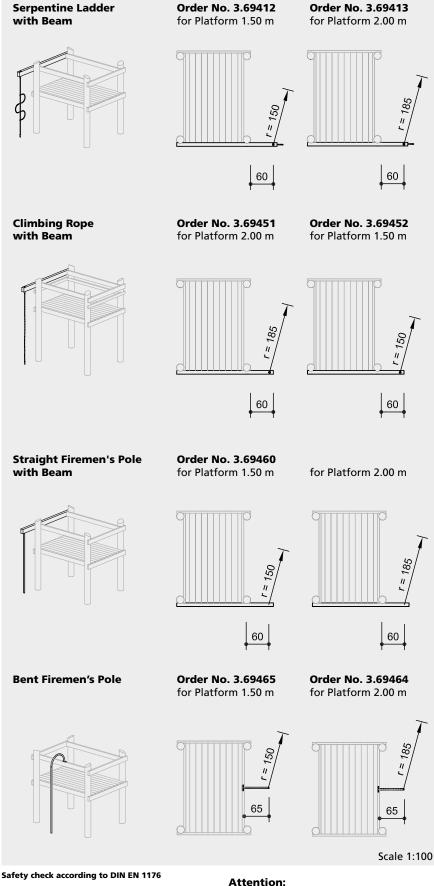

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.









Technical information

Order No. 3.69412 / 3.69413 / 3.69451 / 3.69452

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Rope connection fixed

Fixed rope connection without dangerous openings. Screw connection adjustable and countersunk in the wood



Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



Standard colour rope: rainbow

Order No. 3.69460

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Order No. 3.69464

Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Firemen's poles made of stainless steel, glass bead blasted, Ø 42 mm

Components

Order No. 3.69412 / 3.69413

1 Serpentine Ladder with beam and chain as anchoring to the ground each

Order No. 3.69451 / 3.69452

1 Climbing rope with beam and chain as anchoring to the ground each

Order No. 3.69460

1 Straight firemen's pole with beam

Order No. 3.69464

1 Bent fireman's pole

Installation information

Surfacing requirements fall height determined by platform height (please refer to price list for more detailed information)

Foundations

Order No 3.69412 / 3.69413 / 3.69451 / 3.69452 1 item 30 x 30 x 30 cm

Excavation depth 50 cm Order No 3.69460 / 3.69464

1 item 30 x 30 x 30 cm Excavation depth 60 cm