

Play value

Our Hammock appeals to young and old alike. Swinging and rocking are connected to the experiences of human beings in many different ways. Children in particular are looking for possibilities to enjoy swinging movement. Lying in the Hammock is even more pleasant when a friendly co-player sets the swing into motion from outside. It is special fun if there are several children in the hammock. Moreover, it is suitable for cross-generational "adventures".



Standard colour of ropes is red.



Photo © Lucia Bartl


Hammock


Fundamental characteristics

- Unique and original
- Incentive for playing: chance to lie down
- Movement: swaying, rocking

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



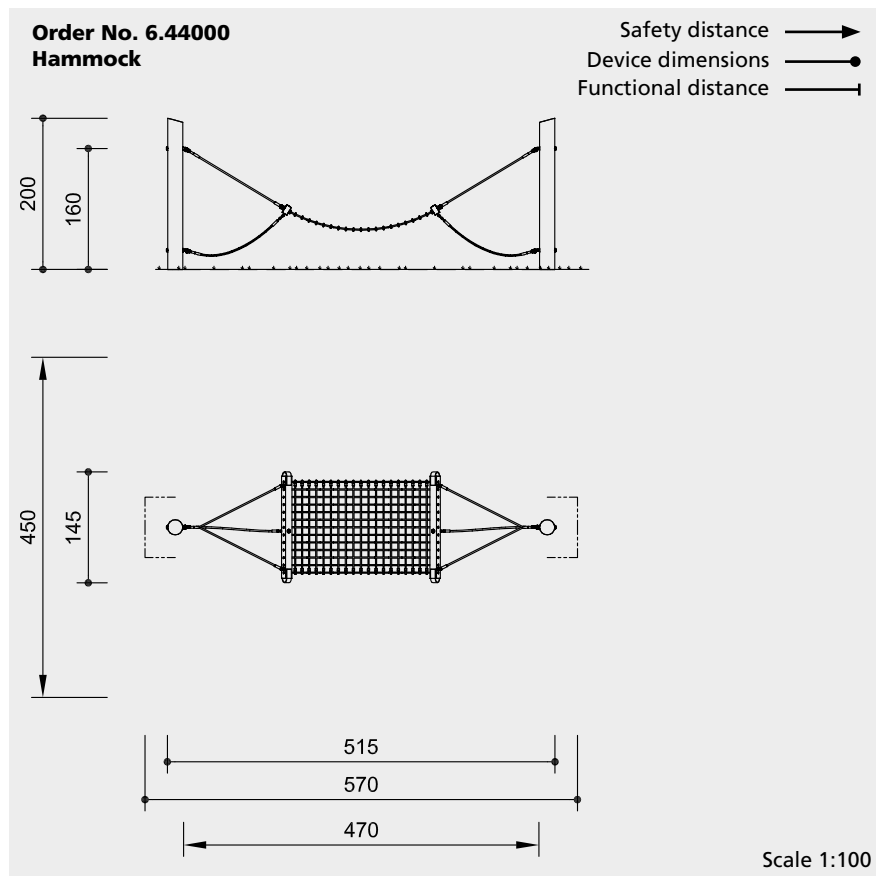

Safety check according to DIN EN 1176

Components

- 2 Stand posts with steel feet
- 1 Hammock with deflection limitation

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m (please refer to price list for more detailed information)

Foundations
2 items 80 x 80 x 60 cm
Excavation depth 80 cm

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Hercules rope

Hercules rope, for spliced net connections. A compound of steel rope for the core and polyester or polyamide yarn for the sheath. High abrasion resistance, 4 or 6 strands



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



Universal joint

Drop-forged, hot-dip galvanised universal joint, consists of two sintered bushes, for free swinging in any direction



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel




For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Height	2.00 m
Length	5.15 m
Width	1.45 m
Weight	180 kg



6.44000