Play value

Due to its low height and its minimum inclination, the Rotating Disc allows turning from relaxed to wild. The effects of centrifugal force can be experienced, balancing in combination with running can be developed. There is much fun especially together with others, for those who get turned around as well as for those who set the disc in motion. It is very relaxing to turn around gently while having a chat.







Rotating Disc

Fundamental characteristics


- Wooden surface for pleasant tactile experience
- Careful selection of materials and high-quality finish
- Incentive for playing: large disc
- Movement: physical power, turning

Recommended for

- School children
- Young people
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pool, adventure pools or similar
- Water play areas with and without supervision
- Leisure parks





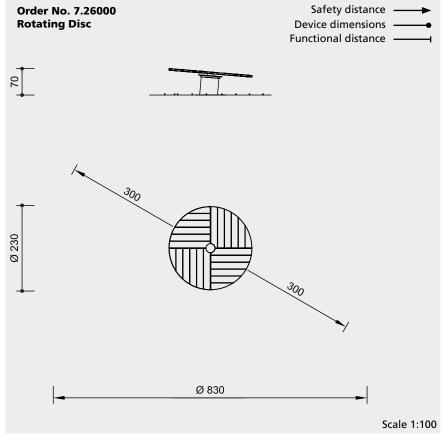

Safety check according to DIN EN 1176

Components

- 1 Disc
- 1 Rotating mechanism
- 1 Foundation frame

Installation information

Surfacing requirements corresponding to a fall height of \leq 1.00 m (please refer to price list for more detailed information)

Foundations 1 item 80 x 80 x 75 cm Excavation depth 80 cm

Attention:

Exact measurements may vary, for all installation dimensions refer to current installation instructions. Technical changes reserved.

Technical information

Rotating floor of 35 mm planks made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Roller bearings

High-quality roller bearings made of chrome steel or stainless steel for rotating elements, easy to maintain and exchange, sealed



For more detailed explanation of the quality characteristics see price list.

Carousel structure made of stainless steel, glass bead blasted

Expanding and shrinking of the planks is reduced by relief cuts applied to the underside

Sturdy, welded substructure

Foundation frame made of steel

Dimensions

(small deviations possible)

0.70 m
2.30 m
340 kg

