

Play value

A playground is not complete without a swing. Children need the possibility of swinging during their development. Swinging to and fro is a basic movement and is fun not only for children. Swinging has a comforting effect, removes tensions and provides pleasure. Our Toddler's Swing has a textile belt-seat; it can be equipped with striped posts on request.



Special version from Order No. L6.12500 Swing with fixed horizontal bar as special swing


Fundamental characteristics

- Child proportions according to ergonomic requirements
- Seats with anatomically correct shape
- Can be combined with horizontal bar
- Movement: swinging, doing exercise


Recommended for

- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar


**Swing with adjustable horizontal bar
Swing with fixed horizontal bar**



L6.12100



L6.12500

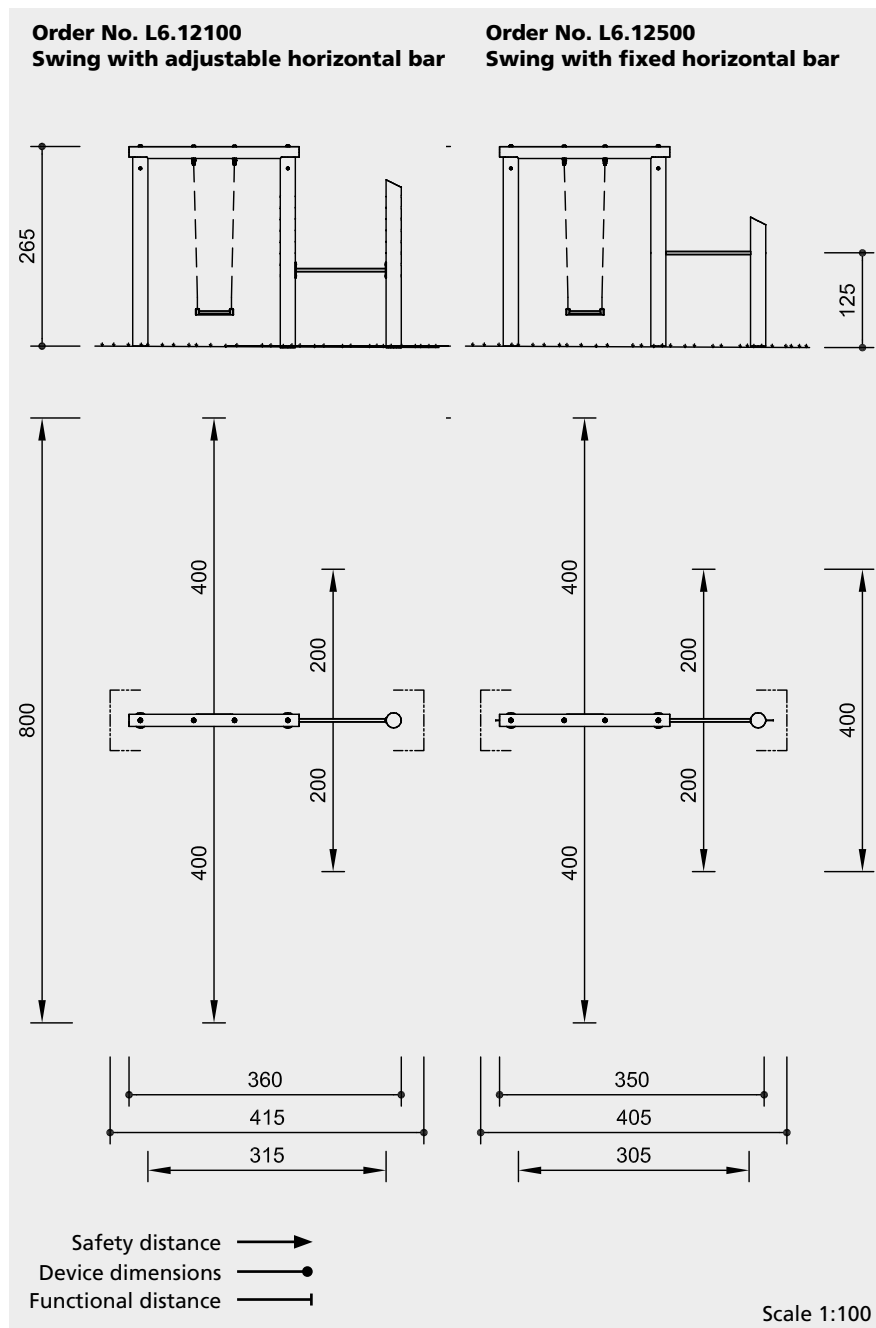

Safety check according to DIN EN 1176

Components

Order No. L6.12100 / L6.12500 Swing with horizontal bar


- 1 Swing frame
- 1 Rubber seat with chains
- 1 Additional vertical post with pre-drilled holes for horizontal bar
- 1 Horizontal bar made of stainless steel

Installation information


Surfacing requirements corresponding to a fall height of
Order No. L6.12100 ≤ 2.00 m (bar)
Order No. L6.12500 ≤ 1.50 m
 (please refer to price list for more detailed information)

Foundations
Order No. L6.12100 / L6.12500
 3 items 80 x 80 x 60 cm
 Excavation depth 80 cm

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
 Technical changes reserved.



L6.12100



L6.12500

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Swing seat

Ergonomically shaped swing seat made of rubber with soft shock absorbing edge. Durable due to strong profiled steel insert



Swing joint

Drop-forged, hot-dip galvanised swing joint with sintered bush and integrated swivel



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Interlocking

Interlocking connection, with milled metal rings or serrated disc dowels, to reinforce the bolt connection under high loads transverse to the grain direction of the wood



End grain connector

End grain connector as special fitting for the adjustable connection of horizontal and vertical timber



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



For more detailed explanation of the quality characteristics see price list.

Horizontal bar of stainless steel, Ø 30 mm, length 1.20 m, height adjustable from 1.00 to 1.90 m, height of not adjustable bar 1.23 m

Dimensions

(small deviations possible)

Order No. L6.12100	
Height	2.65 m
Vertical clearance	2.50 m
Width	3.60 m
Weight	180 kg
Order No. L6.12500	
Height	2.65 m
Vertical clearance	2.50 m
Width	3.50 m
Weight	170 kg