

# Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground.....

Date of installation .....


Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on

- the location
- the usage
- the frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds".

**Ball Valve**  
Order No. 5.20950

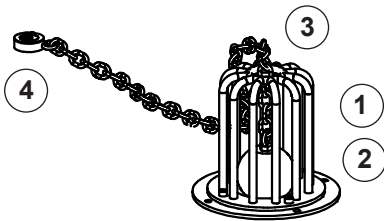

## Operation

1. Rinse with a large amount of water if soiled.
2. If the drain is clogged, unscrew the ball cage (6 mm Allen) and clean.

## Ball

3. If necessary, unscrew ball cage (see above), hold neck of ball weight with pipe wrench while tightening the bolt at the end of the chain using a 17 mm spanner.
4. Check that the other end of the chain is securely connected. If necessary, open the cover of the swivel and retighten the screw.

Special notes, e.g. for repairs

Repair not carried out, it is still possible to play on equipment

Repair not carried out, equipment is taken out of action

All work carried out, everything is in order

Maintenance carried out by:

..... Date .....