

# Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground.....

Date of installation .....


Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on

- location
- usage
- frequency of use
- possible vandalism

For more details see also our general instructions for maintenance of playgrounds!

**Small Excavator**  
Order No. 5.32000

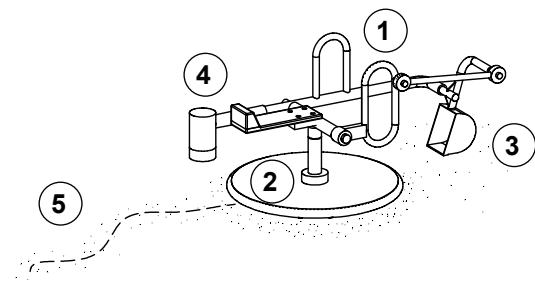

## Joins

1. Check the main joint (for turning the seat) and the joint of the claw arm for smooth operation as well as for wear and tear (replace brass bush if worn down by 50 %).

## Lubrication

2. If necessary, lubricated with suitable grease (universal grease)

## Excavator bucket

3. File down any sharp edges on the shovel caused by wear and tear.

## Seat

4. Check condition of seat surface, smooth if necessary.

## Location

5. Check that foundation chain is fastened properly and check if equipment has moved (**must not be within the safety distances of other equipment**).






Special notes, e.g. for repairs

Repair not carried out, it is still possible to play on equipment


Repair not carried out, equipment is taken out of action

All work carried out, everything is in order

Maintenance carried out by:

..... Date .....

**Spare parts**  
**Small Excavator**  
**Order No. 5.32000**



Please note that the safety standards of the equipment must not be affected. Therefore, when carrying out repairs it is helpful to **only use original parts**.

**Order No. Spare parts**

**0.88170 Set of brass bushes**



**99.00670 Seat**

