

# Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground .....

Date of installation .....


Checks depend on the kind of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on:

- location
- kind of use
- frequency of use
- possible vandalism

For more details see also „General instructions for maintenance of playgrounds“.

**Wheelchair See-Saw**  
Order no. 6.75000/6.75010

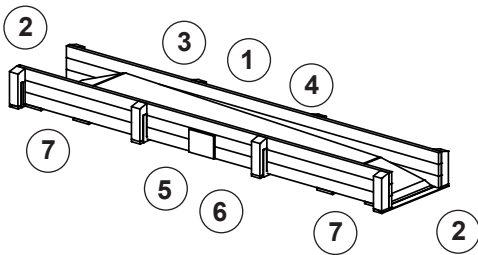

## Wooden parts

1. Check for rot and, if necessary, smooth out splinters and round off sharp edges of cracks.
2. Check that all bolts and screws are tight and re-tighten if necessary.
3. Recommendation: apply paraffin wax to the upper end grain areas once a year, please refer to Order No. 0.90100, 1 litre.
4. Check the leading edges of the ascent ramps for wear.

## Mechanics

5. Check the bearings for smooth motion by using the See-Saw, if necessary remove the central cover plate.
6. Check motion and fastening of the hinges, oil if necessary.
7. Check the rubber buffers of the shock absorbers for wear by lifting the ramps of the ascent.

### Reference note

There must be no gaps between the bottom edge of the equipment and the ground, i. e. danger of squeezing.

Special notes (e. g. for repairs):

Repair not carried out, it is still possible to play on equipment

Repair not carried out, equipment is taken out of action

All work carried out, everything is in order

Maintenance carried out by

..... Date .....